


TRADE ALLY GUIDELINES FOR METER LOCATION REQUIREMENTS

- Meter is above ground and sits approximately 6 inches from the outside of the home being served
- Along the front of or either side of the home
- Meter location must be protected from potential vehicular damage
- Meter must be accessible for maintenance (do not designate meter location behind a fence or a large bush or shrub)
- A minimum of 36 inches (horizontal measure) from any portion of the meter set or regulator to an electric meter
- A minimum of 10 feet from any portion of the meter set to an electric transformer or any mechanical air intake opening
- A minimum of 8 feet 6 inches from any portion of the meter set to the centerline of any railroad track
- A minimum of 36 inches measured in any direction from the vent of the service regulator to:
 - » A combustion air intake
 - » The openable portion of a window (including basement windows)
 - » Any natural gas appliance direct vent assembly as specified by the manufacturer
 - » Any source of ignition that could arc or spark during normal operation
- Not under a carport roof, an awning, or an overhang larger than a standard eave
- Not under a stairwell or staircase providing primary access to the home (stairwells providing alternative access to the home are an exception to this requirement)
- A meter can be placed in a location directly under overhead power lines
- To facilitate proper tie-in of the meter set, house lines must be installed a minimum of 2"–4" out from finished siding
- If you have questions about meter location placement for new construction, please call **(800) 927-6123** or **(503) 220-2360**. For conversion, please call the Dealer Hotline at **(503) 220-2575** or **(800) 422-4012 ext. 2575**

NW Natural Meter Location Requirements – RESIDENTIAL



TOP VIEW

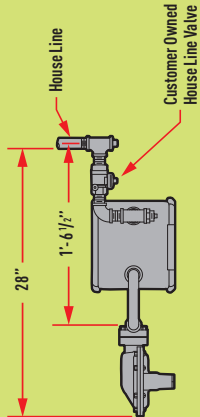

FRONT VIEW

